


Griffolyn® Griff Tape™ is an adhesive backed tape. It is available in two colors; black or white.

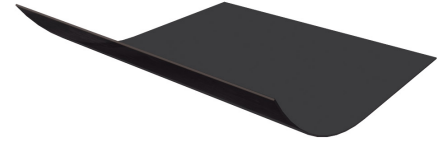

■ Applications

- Wall Vapor Retarder
- Roof Vapor Retarder
- Crawl Space Vapor Retarder
- Temporary Floor Protection
- Plant Dividers and Partitions
- Hazardous Work or Critical Material Equipment Areas

■ Installation

The surface to be taped should be clean and dry. The tape will not adhere if the surfaces are not properly prepared. Dirty or wet surfaces should be completely cleaned with water, paper towels, dry rags or other materials which will prepare the surface for the tape. Accumulations of dust should also be removed to insure a secure seam.

The product obtains optimum adhesion when the surfaces to be bonded are warm. The surfaces should be above 50-60°F to insure an acceptable bond. In order to obtain a bond at lower temperatures, external heat may be required. The use of an industrial style hot air blower is one recommended method. Extra care should be taken when attempting to install tape at temperatures below 32°F.

**MADE
USA
IN THE**

■ Physical Properties & Typical Values

PROPERTY	TEST METHOD	U.S. VALUE	METRIC VALUE
Roll Length	-	180 ft	55 M
Roll Weight	-	3.75 lbs	1.7 Kg
Adhesion to Steel	-	38 oz / in	11 g / mm
Tensile 1"	-	25 lbs	111 N
Unwind 1"	-	2.5 lbs	11 N
Max Performance Temperature	-	200°F	93°C
Elongation	-	20%	20%
Gauge	-	11 mils	.28 mm
Width	-	4 in	100 mm

GRIFFOLYN® GRIFF TAPE™