


This accessory is typically fabricated with a cylindrical sleeve welded to a flat flange. Standard uses are for placement over pipe penetrations on a vapor retarders. Pipeboots can be fabricated in a variety of diameters or custom made to fit around rectangular columns.

Pipeboot installation requires Fab Tape™



PART No.	LAYFLAT	DIAMETER	PIPE RANGE	APRON
60-0075	5"	3"	1/2" to 2-1/2"	24" x 24"
60-0076	8"	5"	2-1/2" to 4-1/2"	24" x 24"
60-0116	14"	8"	4-1/2" to 8"	24" x 24"

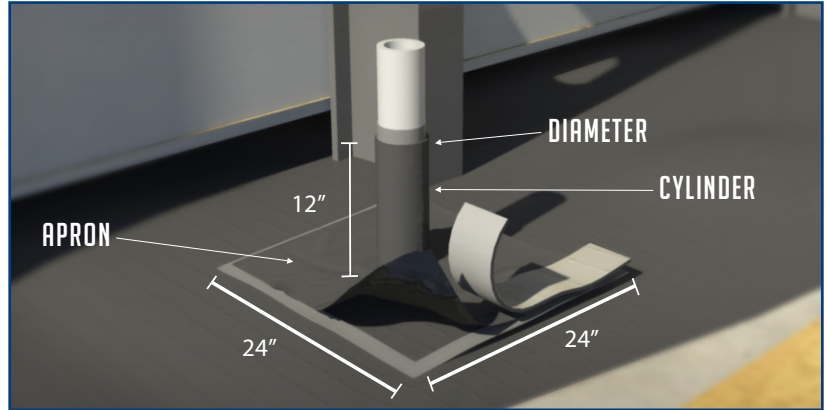

GRIFFOLYN®

FAB TAPE™

Griffolyn® Fab Tape™ is a double sided butyl rubber tape. This tape is a double-sided, reinforced black butyl tape for splicing applications. Ideal for applications where a seal is required between overlapping panels of material. Fab Tape™ comes with a release liner. It is available in black.

Rolls are 1.5" wide x 100' in length.



PIPEBOOT

GRIFFOLYN®