


Griffolyn® Double-sided Sealant Tape is available in gray. The adhesive color is gray. The rolls are individually shrinkwrapped.

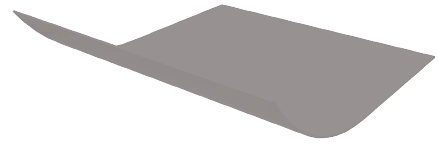

■ Installation

The surface to be taped should be clean and dry. The tape will not adhere if the surfaces are not properly prepared. Dirty or wet surfaces should be completely cleaned with water, paper towels, dry rags or other materials which will prepare the surface for the tape. Accumulations of dust should also be removed to insure a secure seam.

The product obtains optimum adhesion when the surfaces to be bonded are warm. The surfaces should be above 30°F to insure an acceptable bond. In order to obtain a bond at lower temperatures, external heat may be required. The use of an industrial style hot air blower is one recommended method. Extra care should be taken when attempting to install tape at temperatures below 30°F.

■ Physical Properties & Typical Values

PROPERTY	TEST METHOD	U.S. VALUE	METRIC VALUE
Roll Weight (4'x50' Roll)	-	34 oz	965 g
Tensile Strength	-	90 lbs	400 N
Peel Strength	-	110 oz/in	12.0 N/mm
Shear Strength	-	31 LBF	138 N
Application Temperature	-	30° - 140°F	-1° - 60°C